


**IIITians GATE  
CLASSES**

EXCLUSIVE GATE COACHING BY IIT/IISc GRADUATES

A division of PhIE Learning Center



# **QUICK REVISION *FORMULA SHEET***

*for*

## ***GATE-AE MECHANICAL VIBRATIONS***





# Table Of Content

Basic of Mechanical Vibrations and Undamped Free Vibration	05
Free Damped Vibration	09
Forced Vibration	13
Two-Degree of Freedom	15
Vibration of Continuous Systems	16



# OUR ACHIEVERS

## GATE-2023 AE



**SRIRAM R**  
SSN COLLEGE CHENNAI  
**AIR - 2**



**Akriti**  
PEC, CHANDIGARH  
**AIR - 6**



**SHREYASHI SARKAR**  
IEST, SHIBPUR  
**AIR - 8**



**YOKESH K**  
MIT, CHENNAI  
**AIR - 11**



**HRITHIK S PATIL**  
RVCE, BANGALORE  
**AIR - 14**

*And Many More .....*

## GATE-2022 AE



**SUBHROJYOTI BISWAS**  
IEST, SHIBPUR  
**AIR - 4**



**SANJAY. S**  
AMRITA UNIV, COIMBATORE  
**AIR - 7**



**AKILESH . G**  
HITS, CHENNAI  
**AIR - 7**



**D. MANOJ KUMAR**  
AMRITA UNIV, COIMBATORE  
**AIR - 10**



**DIPAYAN PARBAT**  
IEST, SHIBPUR  
**AIR - 14**

*And Many More .....*

## GATE-2021 AE



**NILADRI PAHARI**  
IEST, SHIBPUR  
**AIR - 1**



**VISHAL .M**  
MIT, CHENNAI  
**AIR - 2**



**SHREYAN .C**  
IEST, SHIBPUR  
**AIR - 3**



**VEDANT GUPTA**  
RTU, KOTA  
**AIR - 5**



**SNEHASIS .C**  
IEST, SHIBPUR  
**AIR - 8**

*And Many More .....*



# OUR PSU JOB ACHIEVERS

## DRDO & ADA Scientist B

Job Position for Recruitment (2022-23) Based on GATE AE score

**Mr. Abhilash K** (Amrita Univ Coimbatore)

**Ms. Ajitha Nishma V** (IIST Trivendrum)

**Mr. Dheeraj Sappa** (IIST Shibpur)

**Ms. F Jahangir** (MIT Chennai)

**Mr. Goutham** (KCG College Chennai)

**Mr. M Kumar** (MVJ College Bangalore)

**Mr. Mohit Kudal** (RTU Kota)

**Mr. Niladhari Pahari** (IIST Shibpur)

**Mr. Nitesh Singh** (Sandip Univ Nashik)

**Mr. Ramanathan A** (Amrita Univ Coimbatore)

**Ms. Shruti S Rajpara** (IIST Shibpur)

## HAL DT ENGINEER

Job Position for Recruitment (2023)

**Mr. Anantha Krishan A.G** (Amrita Univ Coimbatore)

**Mr. S.S Sanjay** (Amrita Univ Coimbatore)

**Mr. Shashi Kanth M** (Sastra Univ Tanjore)

**Mr. Vagicharla Dinesh** (Lovely Professional Univ Panjab)



**FATHIMA J**  
(MIT, CHENNAI)

HAL DT ENGINEER 2022



**MOHAN KUMAR .H**  
(MVJCE, BANGALORE)

HAL DT ENGINEER 2022



**ARATHY ANILKUMAR NAIR**  
(AMRITA UNIV, COIMBATORE)

HAL DT ENGINEER 2021



**SADSIVUNI TARUN**  
(SASTRA TANJORE)

HAL DT ENGINEER 2021



**VIGNESHA .M**  
(MIT, CHENNAI)

MRS E-II CRL BEL



**RAM GOPAL SONI**  
(GVIET, PUNJAB)

CEMILAC LAB, DRDO



# MECHANICAL VIBRATIONS

## Chapter 1: BASIC OF MECHANICAL VIBRATIONS AND UNDAMPED FREE VIBRATION

### Basic:

#### Free (Natural) Vibration:

Elastic vibrations in which there is no friction and external forces after the initial releases of the body are known as a free or natural vibration.

#### Damped Vibrations:

When the energy of a vibrating system is gradually dissipated by friction and other resistances. The vibrations are said to be damped. The vibrations gradually cause and the system rests in its equilibrium position.

#### Forced Vibrations:

When a repeated force continuously acts on a system, the vibrations are said to be forced. The frequency of the vibrations is that of the applied force and is independent of their own natural frequency of vibrations.

#### Periodic Motion:

A motion which repeats after equal interval time. **Example:** Simple harmonic motion (SHM)

#### Time Period:

Time to taken for complete one cycle.

Frequency (f) – No. of cycle per unit time

$$\omega = 2\pi f(\text{rad/sec})$$

#### Amplitude:

The maximum displacement of a vibrating body from the mean position.

#### Natural Frequency ( $\omega_n$ ):

- It is a dynamic characteristic of system.
- It is a load independent.
- It is the frequency of free vibration system.

#### Resonance:

When frequency of system becomes equal to natural frequency of system.

Amplitude of vibration becomes excessive.

#### Damping

The resistance to the motion of vibrating system.

#### 1. Equation of Stiffness of a Spring: For A helical Spring

$$k_{\text{equivalent}} = k_{\text{eq}} = \frac{d^4 G}{8D^3 n}$$

d – Wire diameter

D – Coil diameter

G – Shear modulus

n – Number of turns





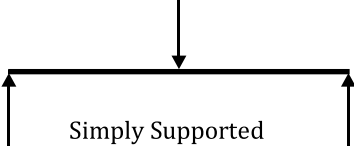
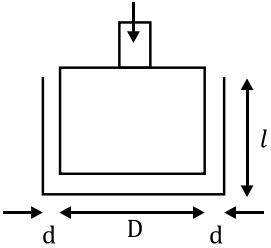
#### 2. Springs in Series:

$$\frac{1}{k_{\text{eq}}} = \frac{1}{k_1} + \frac{1}{k_2} + \dots + \frac{1}{k_n}$$

Springs in parallel

$$k_{\text{eq}} = k_1 + k_2 + k_3 + \dots + k_n$$

### 3. Equivalent Springs of System

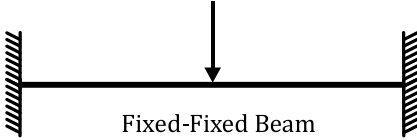System	Formula of Stiffness
 Rod Under Axial Load	$k = \frac{EA}{l}$
 Tapered Rod	$k = \frac{\pi EDd}{4l}$
 Fixed-Fixed Beam	$k = \frac{192EI}{l^3}$
 Cantilever Beam	$k = \frac{3EI}{l^3}$
 Simply Supported	$k = \frac{48EI}{l^3}$
 <p>Axial motion of Piston in a cylinder (Dashpot damper).</p>	$C_{eq} = \frac{\mu 3\pi D^3 l}{4d^3} \left(1 + \frac{2d}{D}\right)$

**4. Combination of Dampers:**

- Parallel  $C_{eq} = C_1 + C_2 + \dots + C_n$
- Series:  $\frac{1}{C_{eq}} = \frac{1}{C_1} + \frac{1}{C_2} + \frac{1}{C_3} + \dots + \frac{1}{C_n}$

**5. Categories of Vibration:**

- $m\ddot{x} + kx = 0$ ; Free undamped
- $m\ddot{x} + c\dot{x} + kx = 0$ ; Free damped
- $m\ddot{x} + kx = F(x)$ ; Forced undamped
- $m\ddot{x} + c\dot{x} + kx = F(x)$ ; Forced damped

**6. Free Vibration:**

**Translational Vibration**





Fig (a) Single degree of freedom

For initial state equilibrium,  $mg = k\Delta$

Where  $\Delta$  = static deflection due to mass

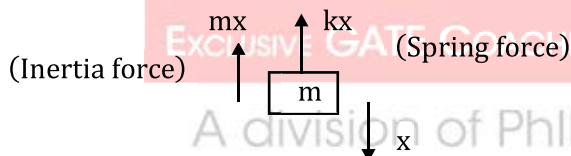

When deflected by  $x$  then equation can be written as,

$$m\ddot{x} + kx = 0 \quad \dots\dots\dots (1)$$

This is the equation of simple harmonic and is analogous to,

$$\ddot{x} + \omega_n^2 x = 0$$

By comparing above equation with equation (1a), we can find

$$\omega_n = \sqrt{\frac{k}{m}}$$

By putting  $\frac{k}{m}$  from initial static equilibrium,

$$\omega_n = \sqrt{\frac{k}{m}} = \sqrt{\frac{g}{\Delta}}$$

Equation of motion for

$$m\ddot{x} + kx = 0$$

$$x = X \sin(\omega_n t + \phi) \dots\dots\dots (2)$$

**Initial Conditions**

If the motion is started by displacing the mass through a distance  $x_0$  and giving a velocity  $V_0$ , then the solution of equation (2) can be found as,

$$t = 0, \quad x = x_0; \quad \dot{x} = V_0$$

$$x = X \sin(\omega_n t + \phi)$$

$$x_0 = X \sin \phi$$

$$\dot{x} = X\omega_n \cos(\omega_n t + \phi)$$

$$V_0 = X\omega_n \cos \phi$$


$$\rightarrow x_0^2 + \left(\frac{V_0}{\omega_n}\right)^2 = X^2$$

$$X = \sqrt{x_0^2 + \left(\frac{V_0}{\omega_n}\right)^2}$$

$$\tan \phi = \frac{x_0}{V_0/\omega_n}$$


$$\phi = \tan^{-1} \left[ \frac{x_0}{V_0/\omega_n} \right]$$

Solution can be plotted graphically

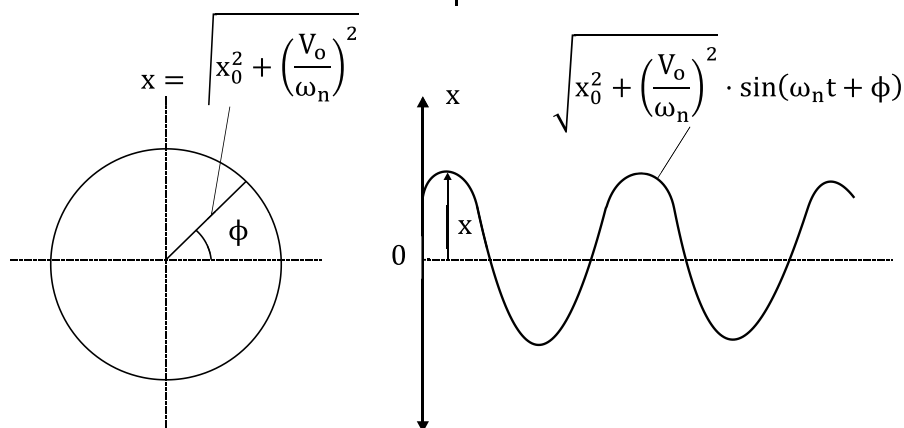

### Rotational Vibration

Let Pendulum is displayed by an angle  $\theta$  of small value.

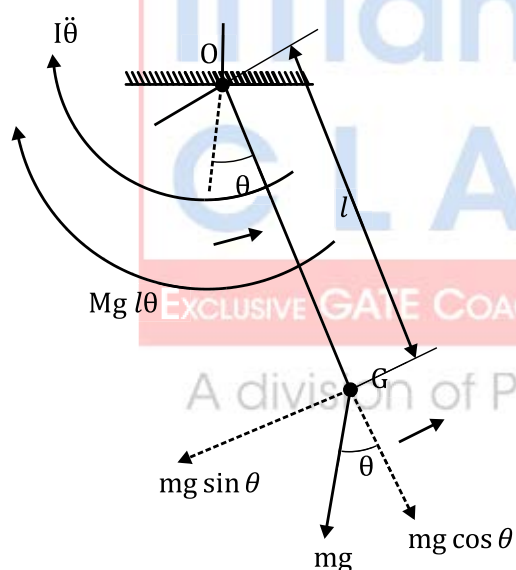

Here G is the centre of gravity.

Restoring torque =  $mg \sin \theta \times l = mgl \cdot \theta$

Inertial torque =  $I \ddot{\theta}$

$$\therefore I \ddot{\theta} + mgl \cdot \theta = 0$$

$$\omega_n = \sqrt{\frac{mgl}{I}}$$

### Torsional Vibration

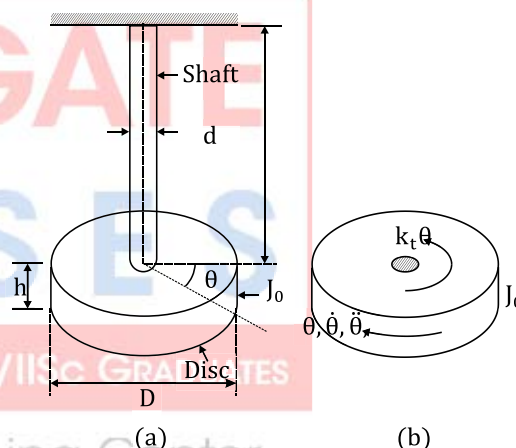


Fig: Torsional Vibration of a Disc

$$J_0 \ddot{\theta} + k_t \theta = 0$$

$$\omega_n = \left( \frac{k_t}{J_0} \right)^{1/2}$$

And the period in seconds and frequency of vibration in cycles per second are

$$\tau_n = 2\pi \left( \frac{J_0}{k_t} \right)^{1/2}$$


$$f_n = \frac{1}{2\pi} \left( \frac{k_t}{J_0} \right)^{1/2}$$



## Chapter 2: FREE DAMPED VIBRATION:

### Types of Damping

#### • Viscous Damping

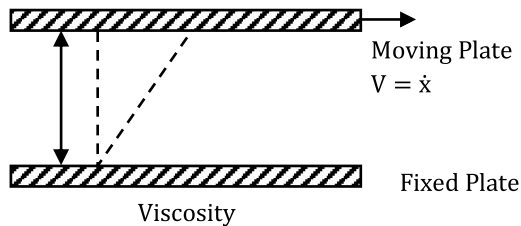

$$F = \frac{\mu A}{t} \dot{x}$$

Where, A = Area of the plate;

t = Thickness

$\mu$  = Coefficient of absolute viscosity of the film

$$F = c \dot{x}$$


Where,  $c = \frac{\mu A}{t}$

Where, c is viscous damping coefficient.

### Energy Dissipation in Viscous Damping

$$\Delta E = \pi c \omega A^2$$


### Differential Equation of Damped Free Translational Vibration

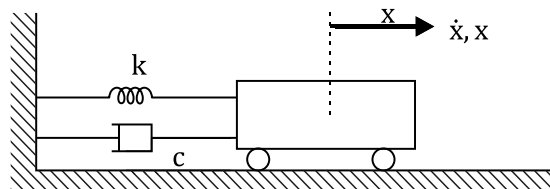

The equation of motion,

$$m\ddot{x} + c\dot{x} + kx = 0$$

Free body diagram



For damped ( $m\ddot{x} + c\dot{x} + kx = 0$ )

Using  $x = Ae^{-st}$

$$S_{1,2} = \frac{-c \pm \sqrt{c^2 - 4mk}}{2m}$$

$$= \frac{-c}{2m} \pm \sqrt{\left(\frac{c}{2m}\right)^2 - \frac{k}{m}}$$

### Critical Damping Coefficient:

$$C_c = 2m\omega_n = 2\sqrt{km}$$

### Natural Frequency:

$$\omega_n = \sqrt{k/m}$$

### Damping Factor or Damping Ratio

$$\xi = \frac{C}{C_c}$$

Now,  $\frac{C}{2m} = \frac{C}{C_c} \cdot \frac{C_c}{2m} = \zeta \omega_n$

So,

$$S_{1,2} = (-\zeta \pm \sqrt{\zeta^2 - 1}) \omega_n$$

If  $C > C_c$  or  $\zeta > 1$ , system is over damped

$C = C_c$  or  $\zeta = 1$ , system is critically-damped

$C < C_c$  or  $\zeta < 1$ , system is under-damped

### Over Damped System ( $\zeta > 1$ )

General solution,

$$x = C_1 e^{(-\zeta + \sqrt{\zeta^2 - 1}) \omega_n t} + C_2 e^{(-\zeta - \sqrt{\zeta^2 - 1}) \omega_n t}$$

For Initial condition,  $x = X_0$   
And  $\dot{x} = 0$   
 $\rightarrow$  At  $t = 0$

Solving for the condition,

$$x = \frac{X_0}{2\sqrt{\zeta^2 - 1}} \left[ \left( -\zeta + \sqrt{\zeta^2 - 1} \right) e^{(-\zeta + \sqrt{\zeta^2 - 1})\omega_n t} + \left( -\zeta - \sqrt{\zeta^2 - 1} \right) e^{(-\zeta - \sqrt{\zeta^2 - 1})\omega_n t} \right]$$

### Critical Damped System ( $\zeta = 1$ )

$$S_1 = S_2 = -\omega_n$$

$$\text{Solution, } x = (C_1 + C_2 t) e^{-\omega_n t}$$

For initial condition,  $x = X_0$   
And  $\dot{x} = 0$   
 $\rightarrow$  At  $t = 0$

$$\rightarrow x = X_0 (1 + \omega_n t) e^{-\omega_n t}$$

- Critical damping is smallest damping for which response is non-oscillatory
- With Critical damping system will have steep fall in displacement

### Under - Damped System ( $\zeta < 1$ )

$$x = \frac{X_0}{\sqrt{1 - \zeta^2}} e^{-\zeta \omega_n t} \sin(\omega_d t + \phi) \text{ Where, } \phi = \tan^{-1} \left( \frac{\sqrt{1 - \zeta^2}}{\zeta} \right)$$

$$\text{Amplitude} = \frac{X_0}{\sqrt{1 - \zeta^2}} e^{-\zeta \omega_n t}$$

Which seems to decay exponentially with time. Theoretically, the system will never come to rest, although the

amplitude of vibration may become infinitely small.

$$\text{Period, } T_d = \frac{2\pi}{\omega_d} = \frac{2\pi}{\omega_n \sqrt{1 - \zeta^2}}$$

### Damped Frequency:

$$\omega_d = \omega_n \sqrt{1 - \zeta^2}$$




### Logarithmic Decrement:

It is the ratio of any two successive amplitudes for an under-damped system vibrating freely is constant and it is a function of damping only



$$\delta = \frac{1}{n} \ln \left( \frac{x_0}{x_n} \right) = \frac{2\pi\zeta}{\sqrt{1 - \zeta^2}} \approx 2\pi\zeta (\zeta \ll 1)$$

Here, amplitude =  $n+1$

Cycles =  $n - 0 = n$

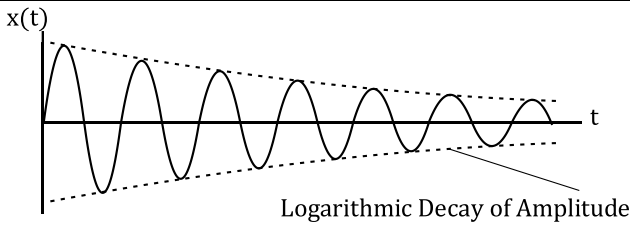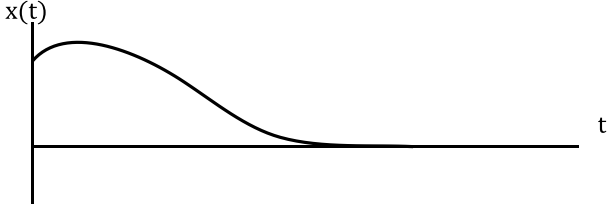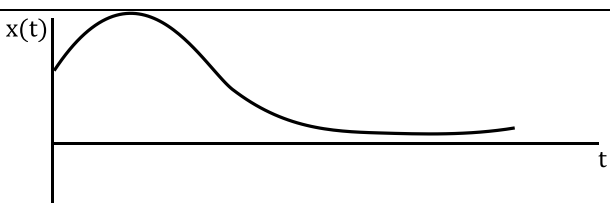Case	Damping Ratio	Curve
Underdamped	$\xi < 1$	
Critical	$\xi = 1$	
Overdamped	$\xi > 1$	

### Differential Equation of Damped Free Torsional Vibration

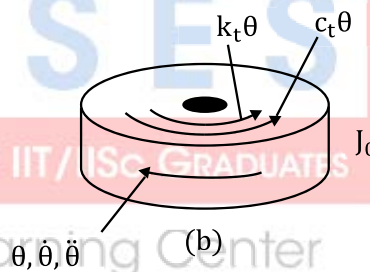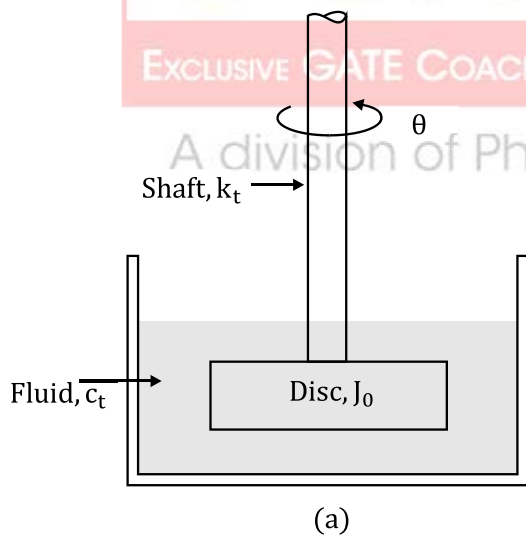

$$J_0 \ddot{\theta} + c_t \dot{\theta} + k_t \theta = 0$$

$$\omega_d = \sqrt{1 - \zeta^2} \omega_n$$

$$\omega_n = \sqrt{k_t / J_0}$$

$$\zeta = \frac{c_t}{c_{tc}} = \frac{c_t}{2J_0 \omega_n} = \frac{c_t}{2\sqrt{k_t J_0}}$$


where  $c_{tc}$  is the critical torsional damping constant

Note- In case of rotational vibration also equation of motion and other quantities will be like torsional vibration

• **COULOMB DAMPING**

This type of damping occurs when two machine parts rubs against each other, dry or un-lubricated. The damping resistance in the case is practically constant and is independent of the rubbing velocity.


**General expression for coulomb damping is:**

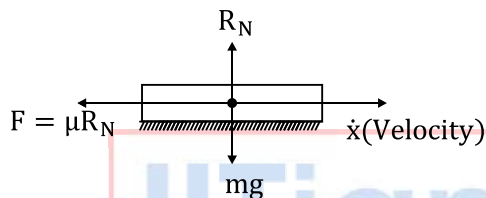

$$F = \mu R_N$$

Where,  $\mu$  = coefficient of friction

$R_N$  = Normal reaction

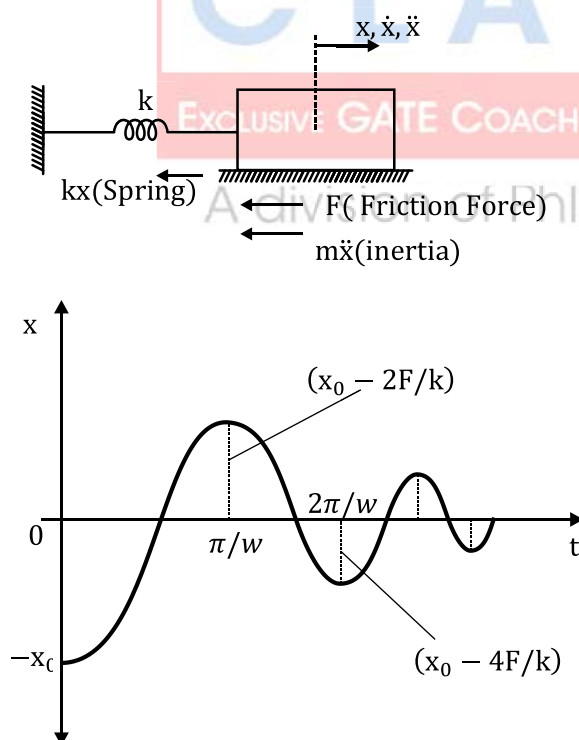

1. The equation of motion is nonlinear with Coulomb damping, whereas it is linear with viscous damping.
2. The natural frequency of the system is unaltered with the addition of Coulomb damping, whereas it is reduced with the addition of viscous damping.
3. The motion is periodic with Coulomb damping, whereas it can be nonperiodic in a viscously damped (overdamped) system.
4. The system comes to rest after some time with Coulomb damping, whereas the motion theoretically continues forever (perhaps with an infinitesimally small amplitude) with viscous and hysteresis damping.
5. The amplitude reduces linearly with Coulomb damping, whereas it reduces exponentially with viscous damping.
6. In each successive cycle, the amplitude of motion is reduced by tire amount  $4fN/k$ , so the amplitudes at the end of any two consecutive cycles are related:


$$X_n = X_{n-1} - \frac{4\mu N}{k}$$

**Structural Damping**

This type of damping is due to the internal friction of the molecules. The




stress – strain diagram for vibrating body is not a straight line but forms a hysteresis loop. The area of which represents the energy dissipated due to molecular friction per cycle per unit volume.

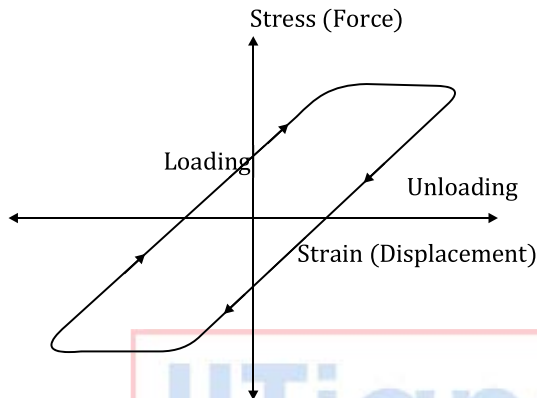

The energy loss per cycle,  
 $E = \pi k \lambda A^2$

### Chapter 3: FORCED VIBRATION

**Forced Vibration:**

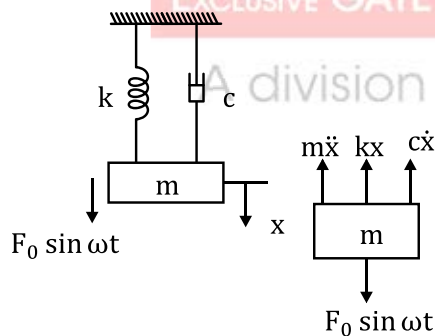

$$m\ddot{x} + c\dot{x} + kx = F_0 \sin \omega t$$

Above differential equation will have two part in solution

The complementary function is obtained from

$$m\ddot{x} + c\dot{x} + kx = 0$$

$$x_c = A_2 e^{-\zeta \omega_n t} \sin \left[ \left( \sqrt{1 - \zeta^2} \right) \omega_n t + \phi_2 \right]$$

If the particular solution is  $x_p$  then

$$x_p = X \sin(\omega t - \phi)$$



$$\text{Then, } X = \frac{X_{st}}{\sqrt{\left[ 1 - \left( \frac{\omega}{\omega_n} \right)^2 \right]^2 + \left[ 2\zeta \frac{\omega}{\omega_n} \right]^2}}$$

$$\phi = \tan^{-1} \left[ \frac{2\zeta \frac{\omega}{\omega_n}}{1 - \left( \frac{\omega}{\omega_n} \right)^2} \right]$$

$$x = x_c + x_p$$

$$= A_2 e^{-\zeta \omega_n t} \sin \left[ \left( \sqrt{1 - \zeta^2} \right) \omega_n t + \phi_2 \right]$$

$$+ \frac{X_{st}}{\sqrt{\left[ 1 - \left( \frac{\omega}{\omega_n} \right)^2 \right]^2 + \left[ 2\zeta \frac{\omega}{\omega_n} \right]^2}} \sin(\omega t - \phi)$$

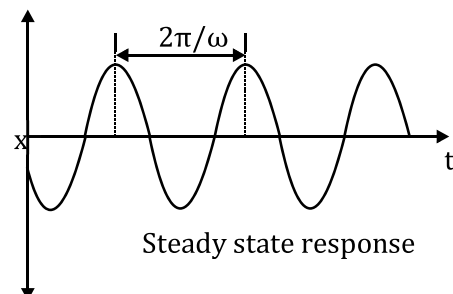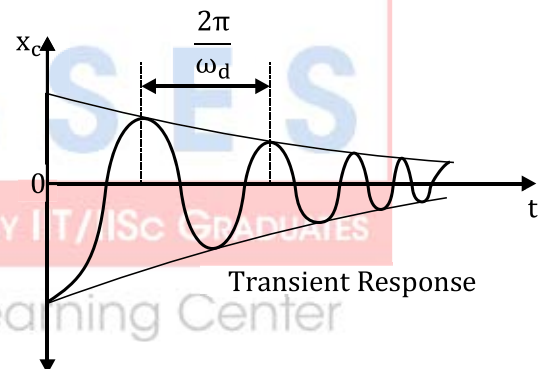

### Magnification Factor

The ratio of the steady state amplitude to the zero frequency (static) deflection i.e.,  $\frac{x}{x_{st}}$  is

defined as the magnification factor and is denoted by M.F.

$$\text{M.F.} = \frac{X}{X_{st}} = \frac{1}{\sqrt{\left[1 - \left(\frac{\omega}{\omega_n}\right)^2\right]^2 + \left[2\zeta \frac{\omega}{\omega_n}\right]^2}}$$

At resonance,  $\frac{\omega}{\omega_n} = 1$


$$\text{M.F.} = \frac{X}{X_{st}} = \frac{1}{2\zeta}$$

### Quality Factor

The magnification factor at resonance is known as quality factor and is denoted by R.

$$R = \frac{1}{2\zeta}$$

### Half power points

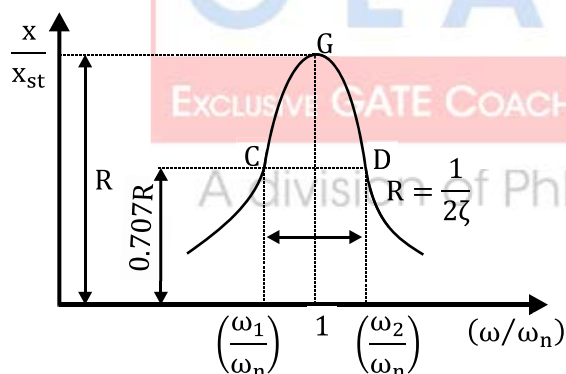

→ C and D are the half power points.

Assume  $\omega_1$  and  $\omega_2$  are frequency corresponding to points C and D respectively.

$$\frac{\omega_2 - \omega_1}{\omega_n} = 2\zeta = \text{Band width} = \frac{1}{R}$$

### Force Transmissibility

$$F_{tr} = \sqrt{(kX)^2 + (c\omega X)^2}$$

$$F_{tr} = X\sqrt{k^2 + (c\omega)^2}$$

$$F_{tr} = \frac{F_o\sqrt{k^2 + (c\omega)^2}}{\sqrt{(k - m\omega^2)^2 + (c\omega)^2}}$$

$$T_r = \frac{F_{tr}}{F_o} = \frac{\sqrt{1 + \left(2\zeta \frac{\omega}{\omega_n}\right)^2}}{\sqrt{\left[1 - \left(\frac{\omega}{\omega_n}\right)^2\right]^2 + \left[2\zeta \frac{\omega}{\omega_n}\right]^2}}$$

$T_r$  being the transmissibility

### Forced Vibration with Rotating and Reciprocating Unbalance

$$m \frac{d^2x}{dt^2} + c \frac{dx}{dt} + kx = m_0 e \omega^2 \sin \omega t$$


$$X = \frac{\frac{m_0 e \omega^2}{k}}{\sqrt{\left(1 - \frac{m\omega^2}{k}\right)^2 + \left(\frac{c\omega}{k}\right)^2}}$$

$$\frac{X}{\left(\frac{m_0 e}{m}\right)} = \frac{\left(\frac{\omega}{\omega_n}\right)^2}{\sqrt{\left[1 - \left(\frac{\omega}{\omega_n}\right)^2\right]^2 + \left[2\zeta \frac{\omega}{\omega_n}\right]^2}}$$


$$\phi = \tan^{-1} \left[ \frac{2\zeta \frac{\omega}{\omega_n}}{1 - \left(\frac{\omega}{\omega_n}\right)^2} \right]$$

At resonance when  $\frac{\omega}{\omega_n} = 1$ , we have

$$\frac{X}{\left(\frac{m_0 e}{m}\right)} = \frac{1}{2\zeta}$$

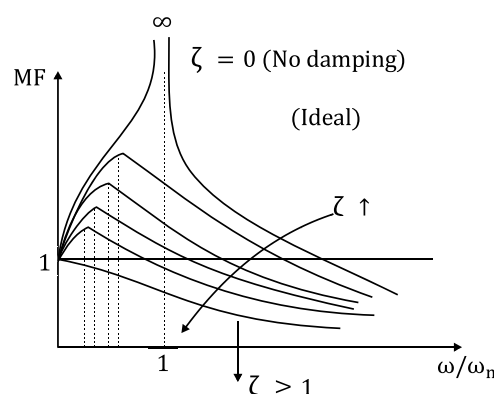

### Vibration Isolation:



$$\epsilon = \frac{F_T}{F_o}$$


If  $0 < \epsilon < 1$  (Machine support)

If  $\epsilon > 1$  (Machine adverse)


$\epsilon$  = Machine Transmissibility

$$\epsilon = \frac{\sqrt{1 + \left(2\zeta \left(\frac{\omega}{\omega_n}\right)\right)^2}}{\sqrt{\left(1 - \left(\frac{\omega}{\omega_n}\right)^2\right)^2 + \left(2\zeta \frac{\omega}{\omega_n}\right)^2}}$$

$\epsilon$  depends on  $\zeta$  and  $\omega/\omega_n$

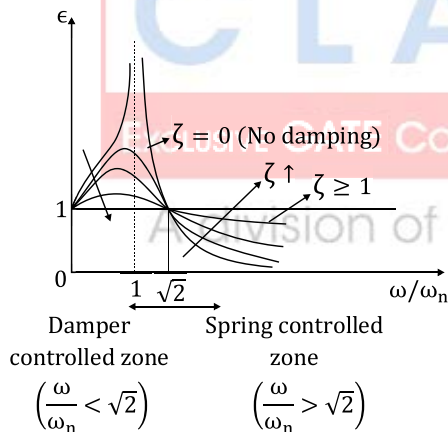

### Motion Transmissibility:

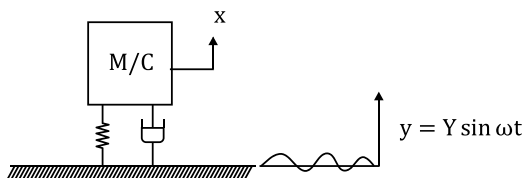


$$\epsilon = \frac{\text{Aplitude of mass}(X)}{\text{Aplitude of foundation}(Y)}$$

$$m\ddot{x} + c(\dot{x} - \dot{y}) + k(x - y) = 0$$

$$\epsilon = \frac{X}{Y} = \pm \frac{\sqrt{k^2 + (c\omega)^2}}{\sqrt{(k - m\omega^2)^2 + (c\omega)^2}}$$

### Chapter 4: TWO-DEGREE OF FREEDOM



If  $x_1$  and  $x_2$  are degrees of freedom

Let  $x_1 > x_2$

Equation of motion for masses

$$m_1\ddot{x}_1 + (k_1 + k_2)x_1 - k_2x_2 = 0 \quad \dots\dots\dots (1)$$

$$m_2\ddot{x}_2 + (k_3 + k_2)x_2 - k_2x_1 = 0 \quad \dots\dots\dots (2)$$

Let,  $x_1 = X_1 \cos(\omega t + \phi)$  ;  $x_2 = X_2 \cos(\omega t + \phi)$

$$\{-m_1\omega^2 + (k_1 + k_2)\}X_1 - k_2X_2 = 0 \quad \dots\dots\dots (3)$$

$$-k_2X_1 + \{-m_2\omega^2 + (k_2 + k_3)\}X_2 = 0 \quad \dots\dots\dots (4)$$

$$(m_1m_2)\omega^4 - \{m_1(k_3 + k_2) + m_2(k_1 + k_2)\}\omega^2 + \{k_1k_2 + k_2k_3 + k_3k_1\} = 0$$

**Above equation is the equation to calculate natural frequencies**

ratio of amplitude of frequencies can be found.

$$\begin{aligned} r_1 &= \frac{X_1^{(1)}}{X_2^{(1)}} \\ &= \frac{k_2}{-m_1\omega_1^2 + (k_1 + k_2)} \\ &= \frac{-m_2\omega_1^2 + (k_2 + k_3)}{k_2} ; \end{aligned}$$

(amplitude ratio at frequency  $\omega_1$ )

$$\begin{aligned} r_2 &= \frac{X_1^{(2)}}{X_2^{(2)}} \\ &= \frac{k_2}{-m_1\omega_2^2 + (k_1 + k_2)} \end{aligned}$$

$$= \frac{-m_2 \omega_2^2 + (k_2 + k_3)}{k_2};$$

(amplitude ratio at frequency  $\omega_2$ )

The normal modes of vibration corresponding to  $\omega_1^2$  and  $\omega_2^2$  can be expressed.

$$\vec{X}^{(1)} = \begin{Bmatrix} X_1^{(1)} \\ X_2^{(1)} \end{Bmatrix} = \begin{Bmatrix} X_1^{(1)} \\ (1/r_1)X_1^{(1)} \end{Bmatrix}$$

$$\text{And } \vec{X}^{(2)} = \begin{Bmatrix} X_1^{(2)} \\ X_2^{(2)} \end{Bmatrix} = \begin{Bmatrix} X_1^{(2)} \\ (1/r_2)X_1^{(2)} \end{Bmatrix}$$

The vectors  $\vec{X}^{(1)}$  and  $\vec{X}^{(2)}$ , which denote the normal mode of vibration are known as 'mode vectors' of the system.

**Motion for mass  $m_1$  can be written as**

$x_1(t) = x_1^{(1)}(t) + x_1^{(2)}(t)$ ; (motion with  $\omega_1$  and  $\omega_2$ )

$$x_1(t) = X_1^{(1)} \cos(\omega_1 t + \phi_1) + X_1^{(2)} \cos(\omega_2 t + \phi_2)$$

**Motion for mass  $m_2$  can be written as**

$x_2(t) = x_2^{(1)}(t) + x_2^{(2)}(t)$ ; (motion with  $\omega_1$  and  $\omega_2$ )

$$x_2(t) = X_2^{(1)} \cos(\omega_1 t + \phi_1) + X_2^{(2)} \cos(\omega_2 t + \phi_2)$$

If initial velocities are zero then

$$\begin{aligned} x_1 &= X_1^{(1)} \cos \omega_1 t + X_1^{(2)} \cos \omega_2 t \\ x_2 &= X_2^{(1)} \cos \omega_1 t + X_2^{(2)} \cos \omega_2 t \end{aligned}$$

$$\frac{X_1^{(1)}}{X_2^{(1)}} = \left( \frac{X_1}{X_2} \right)_1$$

$$\frac{X_2^{(2)}}{X_2^{(2)}} = \left( \frac{X_1}{X_2} \right)_2$$

$$\begin{aligned} X_1^{(1)} + X_1^{(2)} &= \text{Initial displacement } m_1 \\ X_2^{(1)} + X_2^{(2)} &= \text{Initial displacement } m_2 \end{aligned}$$

## Static And Dynamic Coupling in Vibration


**Static Coupling-** If non principle diagonal terms ( $K_{ij}$ ) in K matrix are non-zero then system is said to be statically coupled.

**Dynamics Coupling-** If non principle diagonal terms ( $M_{ij}$  or  $C_{ij}$ ) in M and C matrix are non-zero then system is said to be dynamically coupled.

## Chapter 5: VIBRATION OF CONTINUOUS SYSTEMS

Continuous system has infinite principal mode of vibration and have infinite natural frequencies. **Example:** Vibration of string, bar/rod, beam, shaft etc.

### 1. Vibrating String:

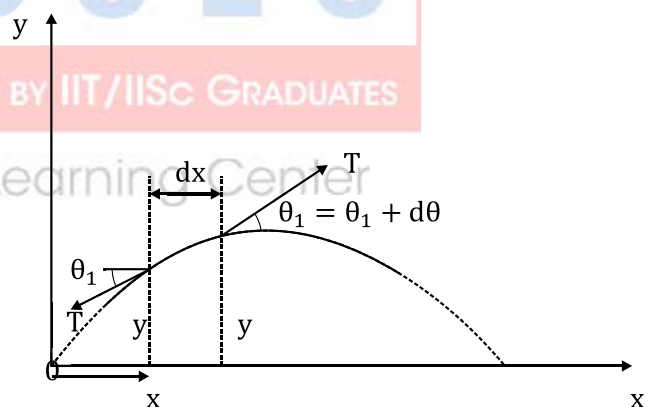

$$\frac{\partial^2 y}{\partial x^2} = \frac{1}{c^2} \frac{\partial^2 y}{\partial t^2} \quad \left( \text{putting, } c^2 = \frac{T}{\rho} \right)$$

$$\therefore c = \sqrt{\frac{T}{\rho}}$$

= velocity of wave propagation

→ This equation is one-dimensional wave equation for lateral vibrations of string.

**Sol for gov differential equation**



$$y = XT$$

$$y = \sum_{i=1}^{\infty} \left( A_i \sin \frac{\omega_i}{c} x + B_i \cos \frac{\omega_i}{c} x \right) \left( C_i \sin \omega_i t + D_i \cos \omega_i t \right)$$


**Note:** Above equation has 2 boundary conditions and 2 initial conditions

**For both ends fixed:**

At  $x = 0$  &  $L \rightarrow y = 0$

$$\rightarrow \omega = \frac{n\pi}{L} \sqrt{\frac{T}{\rho}}$$

## 2. Longitudinal Vibration of a Bar:

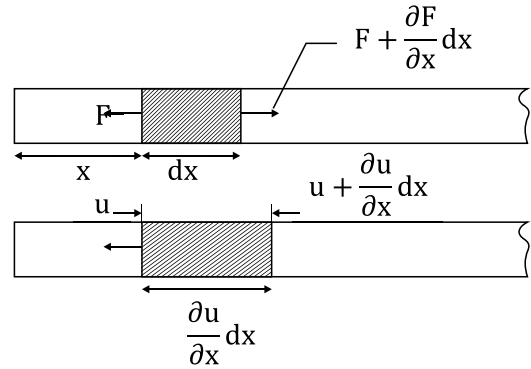

$$\frac{\partial^2 u}{\partial x^2} = \frac{1}{c^2} \frac{\partial^2 u}{\partial t^2}$$

$$\text{Where, } c^2 = \frac{E}{\rho} \text{ or } c = \sqrt{\frac{E}{\rho}}$$


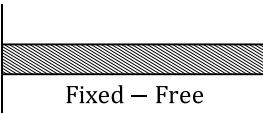

$c$  is the velocity of wave propagation in bar/rod

**Sol for gov differential equation**

$$u = XT$$

$$u = \sum_{i=1}^{\infty} \left( A_i \sin \frac{\omega_i}{c} x + B_i \cos \frac{\omega_i}{c} x \right) \left( C_i \sin \omega_i t + D_i \cos \omega_i t \right)$$


### Boundary Conditions and Natural Frequencies:

Condition	Boundary Conditions	Frequency Equation	Mode Shape (Normal Function)	Natural Frequency
 Free – Free	$\frac{\partial u}{\partial x}(0, t) = 0$ $\frac{\partial u}{\partial x}(l, t) = 0$	$\sin\left(\frac{\omega l}{c}\right) = 0$	$u_n(x) = c_n \cos\left(\frac{n\pi x}{l}\right)$	$\omega_n = \frac{n\pi c}{l}, n = 0, 1, 2, \dots$
 Fixed – Free	$u(0, t) = 0$ $\frac{\partial u}{\partial x}(l, t) = 0$	$\cos\left(\frac{\omega l}{c}\right) = 0$	$u_n(x) = c_n \frac{(2n+1)\pi x}{2l}$	$\omega_n = \frac{(2n+1)\pi c}{2l}, n = 0, 1, 2, \dots$
 Fixed – Fixed	$u(0, t) = 0$ $u(l, t) = 0$	$\sin\left(\frac{\omega l}{c}\right) = 0$	$u_n(x) = C_n \cos\left(\frac{n\pi x}{l}\right)$	$\omega_n = \frac{n\pi c}{l}, n = 1, 2, 3, \dots$

**Initial Conditions are:**  $u(x, t = 0) = u_0(x)$

$$\frac{\partial u}{\partial t}(x, 0) = \dot{u}_t(x, 0) = \dot{u}_0(x)$$

### 3. Torsional Vibration of Shaft or Rod.

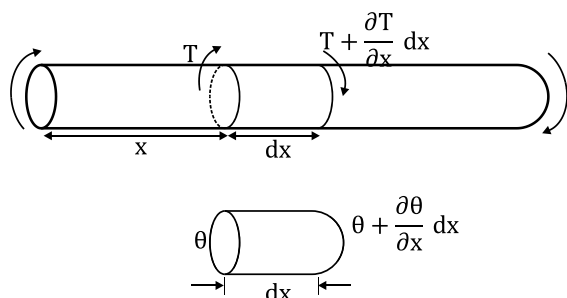

$$\frac{\partial^2 \theta}{\partial x^2} = \frac{1}{c^2} \frac{\partial^2 \theta}{\partial t^2}$$




$$\text{Here, } c = \sqrt{\frac{G}{\rho}}$$

**Sol for gov differential equation**


$$\theta(x, t) = X \cdot T$$

$$\theta = \sum_{i=1}^{\infty} \left( A_i \sin \frac{\omega_i}{c} x + B_i \cos \frac{\omega_i}{c} x \right) ( C_i \sin \omega_i t + D_i \cos \omega_i t )$$

**Boundary Conditions:**

Condition	Boundary Conditions	Frequency Equation	Mode Shape	Natural Frequency
 Free – Free	$\frac{\partial \theta}{\partial x}(0, t) = 0$ $\frac{\partial \theta}{\partial x}(l, t) = 0$	$\sin\left(\frac{\omega l}{c}\right) = 0$	$\theta(x) = C_n \cos\left(\frac{n\pi x}{l}\right)$	$\omega_n = \frac{n\pi c}{l}$ $n = 0, 1, 2, \dots$
 Fixed – Free	$\theta(0, t) = 0$ $\frac{\partial \theta}{\partial x}(l, t) = 0$	$\cos\left(\frac{\omega l}{c}\right) = 0$	$\theta(x) = C_n \sin\left(\frac{(2n+1)\pi x}{2l}\right)$	$\omega_n = \frac{(2n+1)\pi c}{2l}$ $n = 0, 1, 2, \dots$
 Fixed – Fixed	$\theta(0, t) = 0$ $\theta(l, t) = 0$	$\sin\left(\frac{\omega l}{c}\right) = 0$	$\theta(x) = C_n \cos\left(\frac{n\pi x}{l}\right)$	$\omega_n = \frac{n\pi c}{l}$ $n = 1, 2, 3, \dots$

**4. Lateral Vibration of Beam:**

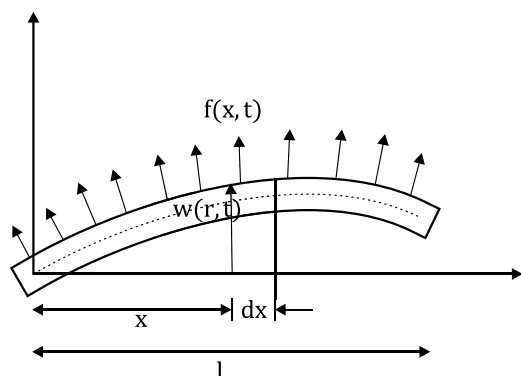

$$EI \frac{\partial^4 w}{\partial x^4} + \rho A \frac{\partial^2 w}{\partial t^2} = 0$$

Or

$$c^2 \frac{\partial^4 w}{\partial x^4} + \frac{\partial^2 w}{\partial t^2} = 0$$

$$c = \sqrt{\frac{EI}{\rho A}}$$

**Sol for gov differential equation**

$$\rightarrow w(x, t) = X(x) \cdot T(t)$$

2<sup>nd</sup> order derivative w.r.t. 'time'.

$$w(t) = A \sin \omega t + B \cos \omega t$$

4<sup>th</sup> order derivative w.r.t 'x' displacement

$$w(x) = C_1 \cos \beta x + C_2 \cos h \beta x + C_3 \sin \beta x + C_4 \sin h \beta x$$

$$\beta = \sqrt{\frac{\omega}{c}}$$

$w(x)$  – Normal mode or characteristic function of beam

$\omega$  – Natural frequency

**Boundary Conditions**

**1. Free End:**

$$\text{Bending Moment} = EI \frac{\partial^2 w}{\partial x^2} = 0$$

$$\text{Shear force} = \frac{\partial}{\partial x} \left( EI \frac{\partial^2 w}{\partial x^2} \right) = 0$$

**2. Simply Supported:**

$$\text{Deflection} = w = 0$$

$$\text{Bending Moment} = EI \frac{\partial^2 w}{\partial x^2} = 0$$

**3. Fixed Ends:**

$$\text{Deflection} = 0;$$


$$\text{Slope} = \frac{\partial w}{\partial x} = 0$$

**Summary of B/C**

	Displacement X	Slope $\frac{dX}{dx}$	B. M. $\frac{d^2X}{dx^2}$	S. F. $\frac{d^3X}{dx^3}$
Hinge/ Simply support	0	-	0	-
Fixed support	0	0	-	-

## Beam with different supports

### 1. Simply – Simply Supported Beam




$$\beta L = n \pi$$

$$\omega = n^2 \pi^2 \frac{c}{L^2} = \frac{n^2 \pi^2}{L^2} \sqrt{\frac{EI}{\rho A}}$$

$n = 1$ , first mode of vibration.

### 2. Cantilever Beam




$$(\cos \beta L) (\cos h \beta L) = -1$$

From above equation natural frequencies can be found

$$\beta L = 1.875104$$

$$\omega = 1.875^2 \frac{c}{L^2} = \frac{1.875^2 \pi^2}{L^2} \sqrt{\frac{EI}{\rho A}}$$

### 3. Fixed-Fixed



$$(\cos \beta L) (\cos h \beta L) = 1$$

From above equation natural frequencies can be found

$$\beta L = 4.73$$

$$\omega = 4.73^2 \frac{c}{L^2} = \frac{4.73^2 \pi^2}{L^2} \sqrt{\frac{EI}{\rho A}}$$

\*\*\*\*\*

# OUR COURSES

## GATE Online Coaching

### Course Features



Live Interactive  
Classes



E-Study Material



Recordings of  
Live Classes



Online Mock Tests

## TARGET GATE COURSE

### Course Features



Recorded Videos  
Lectures



Online Doubt  
Support



E-Study Materials



Online Test Series

## Distance Learning Program

### Course Features



E-Study Material




Topic Wise Assignments  
(e-form)



Online Test Series



Online Doubt  
Support



Previous Year Solved  
Question Papers


## OUR COURSES

### Online Test Series


#### Course Features




Topic Wise Tests



Subject Wise Tests



Module Wise Tests



Complete Syllabus Tests

### More About IGC

**SAMPLE  
STUDY MATERIALS**



<https://bit.ly/3Wu7lsp>

**SAMPLE  
MOCK TESTS**



<https://bit.ly/3FDyFOf>

**SAMPLE  
VIDEO LECTURES**



<https://bit.ly/3V4xU6j>

**TEAM IGC GATE**



<https://bit.ly/3G21khi>

**OUR  
TESTIMONIALS**



<https://bit.ly/3Yp2Hh7>

**IGC TELEGRAM  
GROUP**



<https://bit.ly/3j4koCd>

Follow us on:



For more Information Call Us

 **+91-97405 01604**

Visit us

**[www.iitiansgateclasses.com](http://www.iitiansgateclasses.com)**



**IITians GATE  
CLASSES**

EXCLUSIVE GATE COACHING BY IIT/IISc GRADUATES

A division of PhIE Learning Center

*Admission Open for*

**GATE 2025/26**

Live Interactive Classes

**AEROSPACE ENGINEERING**

**ENROLL  
NOW**

For more Information Call Us



**+91-97405 01604**

Visit us [www.iitiansgateclasses.com](http://www.iitiansgateclasses.com)